




# 东莞市地安电子科技有限公司

## DONGGUAN CITY DIERAN ELECTRONICS CO.,LTD

| REVISION RECORD |             |         |          |      |
|-----------------|-------------|---------|----------|------|
| REV.            | DESCRIPTION | ECN NO. | APPROVED | DATE |
|                 |             |         |          |      |
|                 |             |         |          |      |
|                 |             |         |          |      |

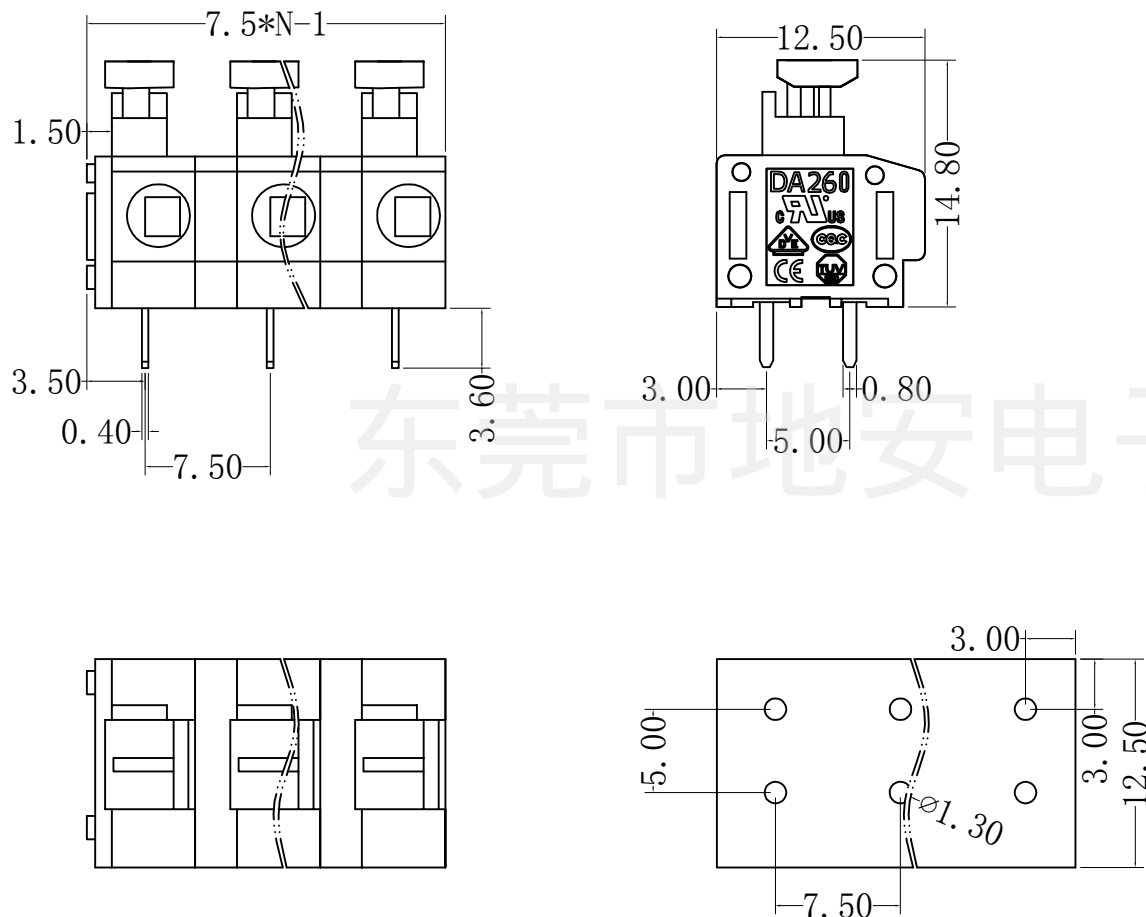

| 项目/参数/认证                             |                   |         |         |         |         |
|--------------------------------------|-------------------|---------|---------|---------|---------|
| 额定电压 (Rated Voltage) [V]             | 450               | 450     | 450     | 300     | 300     |
| 额定电流 (Rated Current) [A]             | 24                | 24      | 24      | 15      | 10      |
| 额定线经平方 (Wire Range mm <sup>2</sup> ) | 0.2-2.5           | 0.2-2.5 | 0.2-2.5 | 0.5-2.5 | 0.5-1.5 |
| 额定线经线号 (Wire Range AWG)              | 24-14             | 24-14   | 24-14   | 20-14   | 20-16   |
| 冲击电压 Impulse withstand voltage       | 4 (KV)            |         |         |         |         |
| 剥线长度 (Stripping Length) [mm]         | 9-10 (mm)         |         |         |         |         |
| 绝缘材料 (Insulation Material)           | PA66 UL94V-0      |         |         |         |         |
| 导体材料 (Contactor Material)            | 黄铜 (Brass)        |         |         |         |         |
| 导体表面镀层 (Contactive Coating)          | 镀锡 (Dumb tin)     |         |         |         |         |
| 间距 (Pitch) [mm]                      | 3.81/5.0/7.5/10.0 |         |         |         |         |
| 级数 (Poles) [P]                       | 2-32P             |         |         |         |         |
| 工作温度 (Operating temperatur) [°C]     | -40°C ~ +105°C    |         |         |         |         |
| 焊锡温度 (Soldering temperature) [°C]    | 250°C / 5S        |         |         |         |         |

| linear dimension (Tolerances Standard GB/T 14486-2008) |       |              |               |               |                |                 | — ▯ ⊥ |                |             |      |
|--|-------|--------------|---------------|---------------|----------------|-----------------|-------|----------------|-------------|------|
| variable range   | to 6  | over 6 to 10 | over 10 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 160 | to 10 | over 10 to 100 | over 100 to |      |
| tolerance  | ±0.20 | ±0.30        | ±0.50         | ±0.70         | ±1.00          | ±1.30           | ±1.60 | 0.10           | 0.30        | 0.60 |

| 单位/UNITS      | mm | 尺寸/SIZE | A4 | 比例/SCALE | 1:1 | 第三视角/THIRD ANGLE PROJECTION | 名称/TITLE  | 版本/REV | VO |
|---------------|----|---------|----|----------|-----|-----------------------------|-----------|--------|----|
| 东莞市地安电子科技有限公司 |    |         |    |          |     |                             | DA260-7.5 |        |    |