

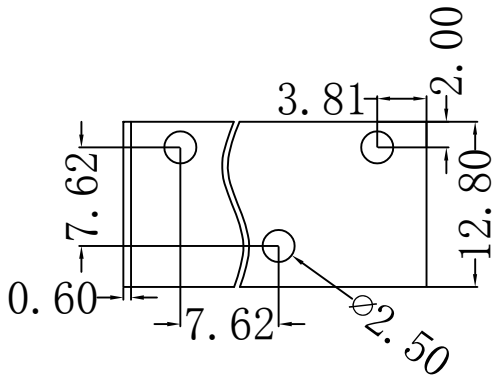
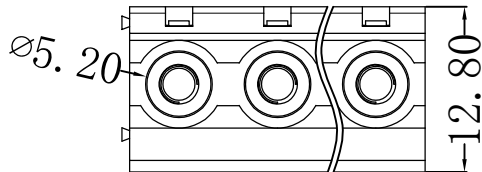


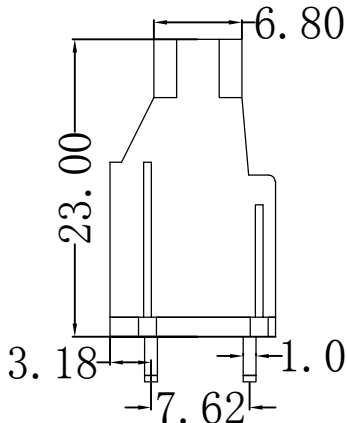

东莞市地安电子科技有限公司
DONGGUAN CITY DIERAN ELECTRONICS CO.,LTD

REVISION RECORD				
REV.	DESCRIPTION	ECN NO.	APPROVED	DATE

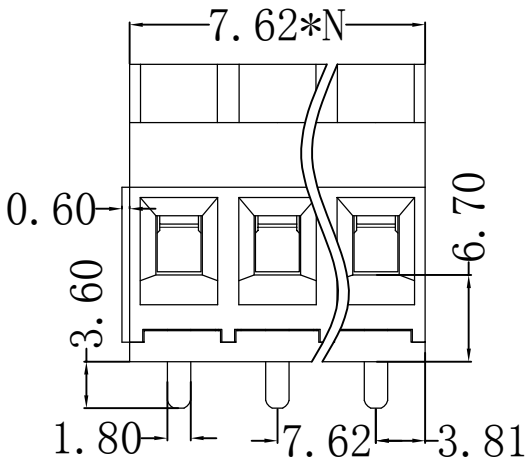

项目/参数

额定电压(Rated Voltage) [V]	300
额定电流(Rated Current) [A]	41
额定线经平方(Wire Range mm ²)	0.2-6
额定线经线号(Wire Range AWG)	24-10
冲击电压 Impulse withstand voltage	5 (KV)
剥线长度(Stripping Length) [mm]	6-7 (mm)
螺丝/扭矩(Screw Torque Max)	M3.0/0.4 (N.m)
绝缘材料(Insulation Material)	PA66 UL94V-0
导体材料(Contact Material)	紫铜 (red Brass)
导体表面镀层(Contactive Coating)	镀锡 (Dumb tin)
间距 (Pitch) [mm]	7.62
级数 (Poles) [P]	2-20P
工作温度(Operating temperatur) [°C]	-40°C ~+105°C
焊锡温度(Soldering temperature) [°C]	250°C /5S

linear dimension (Tolerances Standard GB/T 14486-2008)								—	∇	⊥
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	名称/TITLE	版本/REV	V0
东莞市地安电子科技有限公司							DA168-7.62带底座正脚		