




东莞市地安电子科技有限公司  
DONGGUAN CITY DIERAN ELECTRONICS CO.,LTD

| REVISION RECORD |             |         |          |      |
|-----------------|-------------|---------|----------|------|
| REV.            | DESCRIPTION | ECN NO. | APPROVED | DATE |
|                 |             |         |          |      |
|                 |             |         |          |      |
|                 |             |         |          |      |
|                 |             |         |          |      |

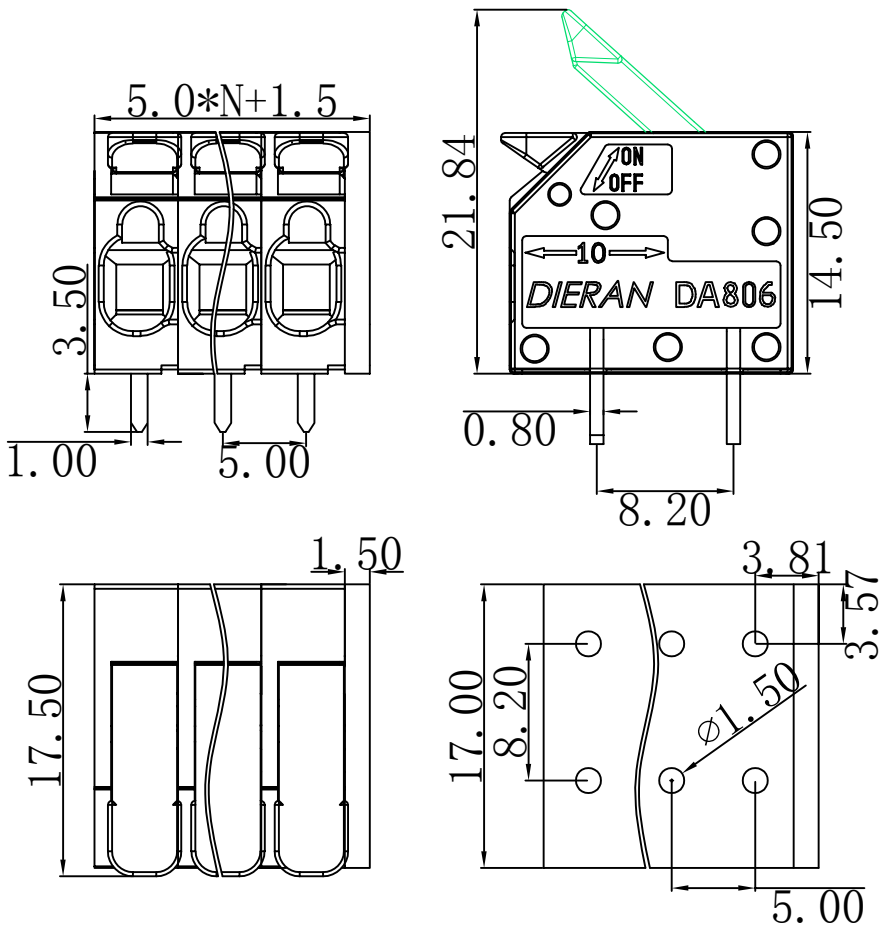

|                                     |                |
|-------------------------------------|----------------|
| 项目/参数/认证                            |                |
| 额定电压(Rated Voltage) [V]             | 300            |
| 额定电流(Rated Current) [A]             | 20             |
| 额定线经平方(Wire Range mm <sup>2</sup> ) | 0.34-4.0       |
| 额定线经线号(Wire Range AWG)              | 22-12          |
| 冲击电压 Impulse withstand voltage      | 4 (KV)         |
| 剥线长度(Stripping Length) [mm]         | 10-11 (mm)     |
| 绝缘材料(Insulation Material)           | PA66 UL94V-0   |
| 导体材料(Contact Material)              | 红铜(Red brass)  |
| 导体表面镀层(Contactive Coating)          | 镀锡 (Dumb tin)  |
| 间距(Pitch) [mm]                      | 5.0            |
| 级数(Poles) [P]                       | 2-32P          |
| 工作温度(Operating temperatur) [°C]     | -40°C ~ +105°C |
| 焊锡温度(Soldering temperature) [°C]    | 250°C / 5S     |

| linear dimension (Tolerances Standard GB/T 14486-2008) |       |              |               |               |                |                 |             | —     | ∇              | ⊥           |
|--------------------------------------------------------|-------|--------------|---------------|---------------|----------------|-----------------|-------------|-------|----------------|-------------|
| variable range                                         | to    | over 6 to 10 | over 10 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 160 | over 160 to | to 10 | over 10 to 100 | over 100 to |
| tolerance                                              | ±0.20 | ±0.30        | ±0.50         | ±0.70         | ±1.00          | ±1.30           | ±1.60       | 0.10  | 0.30           | 0.60        |

|               |    |         |    |          |     |                             |            |        |    |
|---------------|----|---------|----|----------|-----|-----------------------------|------------|--------|----|
| 单位/UNITS      | mm | 尺寸/SIZE | A4 | 比例/SCALE | 1:1 | 第三视角/THIRD ANGLE PROJECTION | 名称/TITLE   | 版本/REV | V0 |
| 东莞市地安电子科技有限公司 |    |         |    |          |     |                             | DA806R-500 |        |    |