








东莞市地安电子科技有限公司

DONGGUAN CITY DIERAN ELECTRONICS CO.,LTD

REVISION RECORD

REV.	DESCRIPTION	ECN NO.	APPROVED	DATE

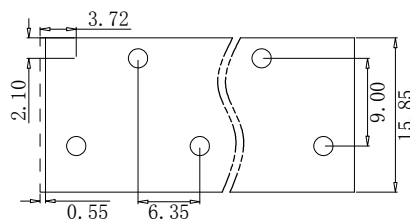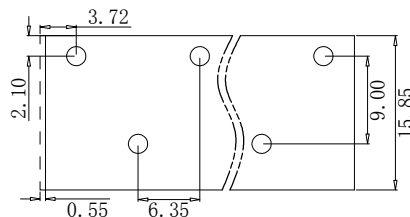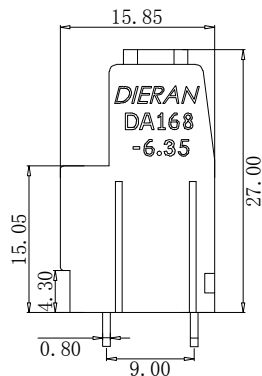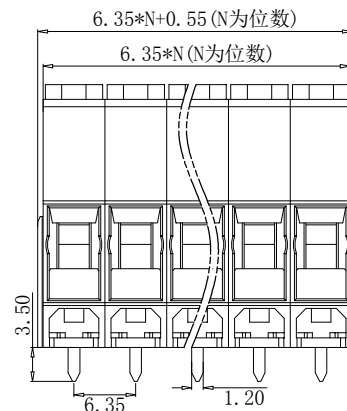

项目/参数/认证



额定电压 (Rated Voltage) [V]

1000

额定电流 (Rated Current) [A]

41

额定线经平方 (Wire Range) [mm²]

0.2-6.0

额定线经线号 (Wire Range) [AWG]

24-10

冲击电压 (Impulse withstand voltage)

8 (KV)

剥线长度 (Stripping Length) [mm]

7-8 (mm)

螺丝/扭矩 (Screw Torque Max)

M3.0/0.5 (N.m)

绝缘材料 (Insulation Material)

PA66 UL94V-0

导体材料 (Contactor Material)

红铜 (Red copper)

导体表面镀层 (Contactive Coating)

镀锡 (Dumb tin)

间距 (Pitch) [mm]

6.35

级数 (Poles) [P]

1-24P

工作温度 (Operating temperatur) [°C]

-40°C ~ +105°C

焊锡温度 (Soldering temperature) [°C]

250°C / 5S

linear dimension (Tolerances Standard GB/T 14486-2008)

— □ ⊥

variable range		over 6	over 10	over 30	over 60	over 100	over 160		over 10	over 100
	to 6	to 10	to 30	to 60	to 100	to 160		to 10	to 100	to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本/REV	V0
东莞市地安电子科技有限公司						名称/TITLE	DA168-6.35 正/反	