

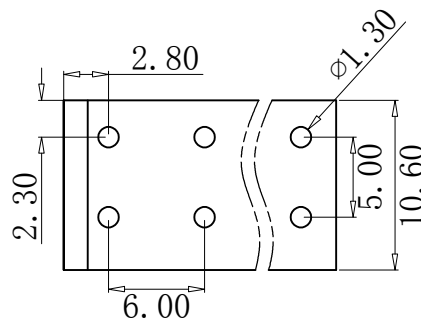



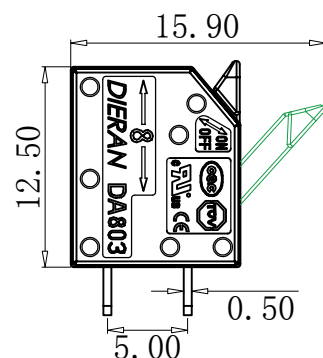

东莞市地安电子科技有限公司
DONGGUAN CITY DIERAN ELECTRONICS CO.,LTD

REVISION RECORD

REV.	DESCRIPTION	ECN NO.	APPROVED	DATE

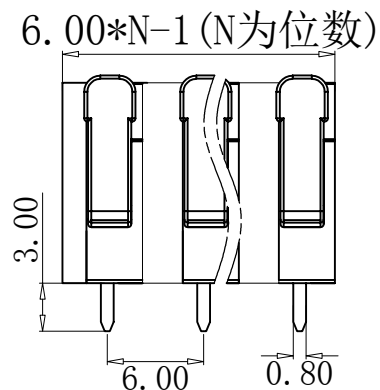

项目/参数/认证				
额定电压 (Rated Voltage) [V]	250	250	250	250
额定电流 (Rated Current) [A]	16	17.5	17.5	10
额定线经平方 (Wire Range mm ²)	0.2-1.5	0.2-1.5	0.2-1.5	0.2-1.5
额定线经线号 (Wire Range AWG)	24-16	24-16	24-16	24-16
冲击电压 Impulse withstand voltage	4 (KV)			
剥线长度 (Stripping Length) [mm]	8-9 (mm)			
绝缘材料 (Insulation Material)	PA66 UL94V-0			
导体材料 (Contactor Material)	黄铜 (brass)			
导体表面镀层 (Contactive Coating)	镀锡 (Dumb tin)			
间距 (Pitch) [mm]	6.0			
级数 (Poles) [P]	2-32P			
工作温度 (Operating temperatur) [°C]	-40°C ~ +105°C			
焊锡温度 (Soldering temperature) [°C]	250°C / 5S			

linear dimension (Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	名称/REV	V0
东莞市地安电子科技有限公司							DA803V-6.0 直针	